


# Kombic

*"Lighting versatility and high visual comfort in a compact design"*

Kombic is reborn in a new design, to become a more versatile family. This compact design offers multiple installation and finishes, as well as a wide variety of luminous flux and optical features.

*Design by Lamp*

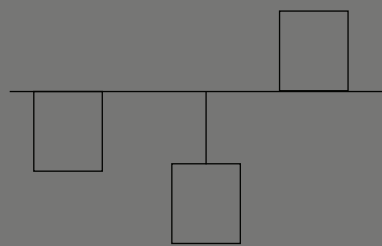




Incorporation of lenses:

Possibility of choosing between Opal or optical options depending on the lighting application requirements. Achieving more homogeneity or a high comfort and light control.










Versatility of applications:

Recessed, surface or suspended installation.

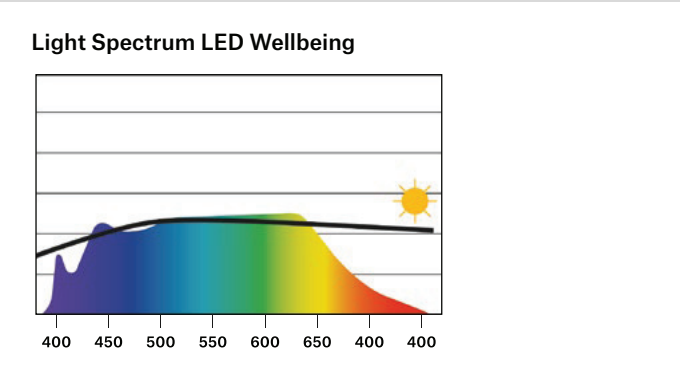

Dynamic lighting, wellbeing and multispectral

A wide variety of technologies available in the same family, incorporating models with WELLBEING and MULTIESPECTRAL technology

|                     |                                                                                                          |                                                                                     |                                                                                               |                                                                                               |
|---------------------|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Models Surface      | 100                                                                                                      | 150                                                                                 | 200                                                                                           |                                                                                               |
|                     |                       |  |            |                                                                                               |
| Dimensions Surface  |                       |  |            |                                                                                               |
| Models Recessed     | 100                                                                                                      | 150                                                                                 | 200                                                                                           | MINI KOMBIC                                                                                   |
|                     |                       |  |            |            |
| Dimensions Recessed |                       |  |            |            |
| Lm LED              | 2000 lm - 2500 lm                                                                                        | 2000 lm - 3500 lm                                                                   | 3000 lm - 5000 lm                                                                             | 1800 lm - 3600 lm                                                                             |
| CRI                 | 80                                                                                                       |                                                                                     |                                                                                               |                                                                                               |
| Beam angle          | <br>OPAL WFL<br>50° |                                                                                     | <br>OPAL | <br>OPAL |
| Color temp.         | 3000 / 4000 K /TW                                                                                        |                                                                                     | 3000 / 4000 K                                                                                 |                                                                                               |
| Driver              | ON/OFF - DALI                                                                                            |                                                                                     |                                                                                               |                                                                                               |
| Power               | 12 - 18 W                                                                                                | 12 - 25 W                                                                           | 17 - 36 W                                                                                     | 12 - 17 W                                                                                     |
| Finishes            | ● Black 02                                                                                               | ○ White 02                                                                          |                                                                                               |                                                                                               |
| Acc. Finishes       | ○ White                                                                                                  | ● Metalized Matt                                                                    | ● Bright                                                                                      | ● Black                                                                                       |

CO-CREATION options

Dimmable 1-10V

Dimmable PUSH

Bluetooth control

Wellbeing

Light Output


Colour rendering index  
CRI 90

Other Distributions


Finishes




Kombic Downlight 100  
Opal




Kombic Downlight 100  
Square Opal



Kombic Downlight 100  
Optic



Kombic Downlight 100  
Square Optic



KOMBIC DOWNLIGHT 100 OPAL

| Family | Installation | Lm LED    | IP       | Optic   | CRI  | K                | Gear     | Reflector Finishes | Ext. Finishes |
|--------|--------------|-----------|----------|---------|------|------------------|----------|--------------------|---------------|
| K11    | RD Round     | 20 2000lm | 40 IP 40 | OP Opal | 8 80 | 30 3000 K        | N ON/OFF | R Bright           | W White 02    |
|        | SQ Square    | 25 2500lm |          |         |      | 40 4000 K        | D DALI   | M Metalized Matt   |               |
|        |              | 20 2000lm | 40 IP 40 | OP Opal | 9 90 | TW Tunable White | D DALI   | W White            |               |
|        | RD Round     | 20 2000lm | 55 IP 55 | OP Opal | 8 80 | 30 3000 K        | N ON/OFF | M Metalized Matt   | W White 02    |

|         |  |  |  |  |      |            |  |  |  |
|---------|--|--|--|--|------|------------|--|--|--|
| Options |  |  |  |  | 9 90 | 27 2700 K  |  |  |  |
|         |  |  |  |  |      | 30 3000 K  |  |  |  |
|         |  |  |  |  |      | 40 4000 K  |  |  |  |
|         |  |  |  |  |      | 3W 3000 WB |  |  |  |
|         |  |  |  |  |      | 4W 4000 WB |  |  |  |

K11 RD 20 40 OP 8 30 N R W

Example: K11 RD 20 40 OP 8 30 N R W

KOMBIC DOWNLIGHT 100 OPTIC

| Family | Installation | Lm LED    | IP       | Optic      | CRI  | K                | Gear     | Reflector Finishes | Ext. Finishes |
|--------|--------------|-----------|----------|------------|------|------------------|----------|--------------------|---------------|
| K11    | RD Round     | 20 2000lm | 40 IP 40 | WF WFL 50° | 8 80 | 30 3000 K        | N ON/OFF | B Black            | B Black 02    |
|        | SQ Square    | 25 2500lm |          |            |      | 40 4000 K        | D DALI   | W White            | W White 02    |
|        |              | 20 2000lm | 40 IP 40 | WF WFL 50° | 9 90 | TW Tunable White | D DALI   | M Metalized Matt   | W White 02    |


|         |  |  |  |  |      |           |  |  |  |
|---------|--|--|--|--|------|-----------|--|--|--|
| Options |  |  |  |  | 9 90 | 27 2700 K |  |  |  |
|         |  |  |  |  |      | 30 3000 K |  |  |  |
|         |  |  |  |  |      | 40 4000 K |  |  |  |

K11 RD 20 40 WF 8 30 N B B

Example: K11 RD 20 40 WF 8 30 N B B

TECHNICAL CHARACTERISTICS


Optics

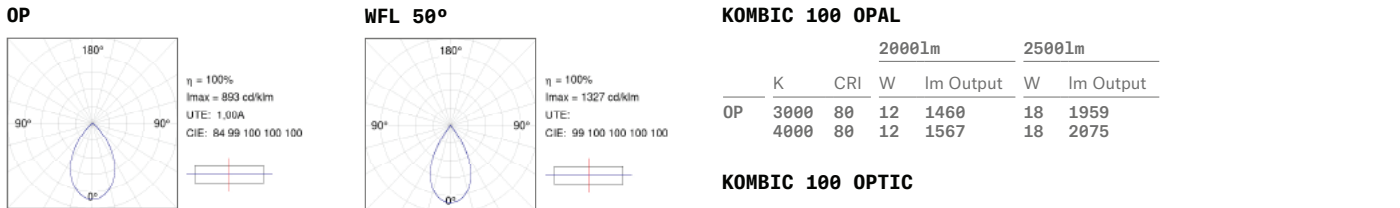


CO-CREATION options



Kombic Downlight 150  
Opal



Kombic Downlight 150  
Optic



KOMBIC DOWNLIGHT 150 OPAL

| Family | Installation | Lm LED    | IP       | Optic   | CRI  | K                | Gear     | Reflector Finishes | Ext. Finishes |
|--------|--------------|-----------|----------|---------|------|------------------|----------|--------------------|---------------|
| K21    | RD Round     | 20 2000lm | 40 IP 40 | OP Opal | 8 80 | 30 3000 K        | N ON/OFF | R Bright           | W White 02    |
|        |              | 30 3000lm |          |         |      | 40 4000 K        | D DALI   | M Metalized Matt   |               |
|        |              | 35 3500lm |          |         |      |                  |          | W White            |               |
|        |              | 30 2500lm | 40 IP 40 | OP Opal | 9 90 | TW Tunable White | D DALI   |                    |               |

|         |  |  |  |  |      |            |  |  |  |
|---------|--|--|--|--|------|------------|--|--|--|
| Options |  |  |  |  | 9 90 | 27 2700 K  |  |  |  |
|         |  |  |  |  |      | 30 3000 K  |  |  |  |
|         |  |  |  |  |      | 40 4000 K  |  |  |  |
|         |  |  |  |  |      | 3W 3000 WB |  |  |  |
|         |  |  |  |  |      | 4W 4000 WB |  |  |  |

K21 RD 20 40 OP 8 30 N R W

Example: K21 RD 20 40 OP 8 30 N R W

KOMBIC DOWNLIGHT 150 OPTIC

| Family | Installation | Lm LED    | IP       | Optic      | CRI  | K         | Gear     | Reflector Finishes | Ext. Finishes |
|--------|--------------|-----------|----------|------------|------|-----------|----------|--------------------|---------------|
| K21    | RD Round     | 20 2000lm | 40 IP 40 | WF WFL 50° | 8 80 | 30 3000 K | N ON/OFF | B Black            | B Black 02    |
|        | SQ Square    | 30 2500lm |          |            |      | 40 4000 K | D DALI   | W White            | W White 02    |
|        |              | 35 3500lm |          |            |      |           |          |                    |               |


|         |  |  |  |  |      |           |  |  |  |
|---------|--|--|--|--|------|-----------|--|--|--|
| Options |  |  |  |  | 9 90 | 27 2700 K |  |  |  |
|         |  |  |  |  |      | 30 3000 K |  |  |  |
|         |  |  |  |  |      | 40 4000 K |  |  |  |

K11 RD 20 40 WF 8 30 N B B

Example: K21 RD 20 40 WF 8 30 N B B

TECHNICAL CHARACTERISTICS

Optics

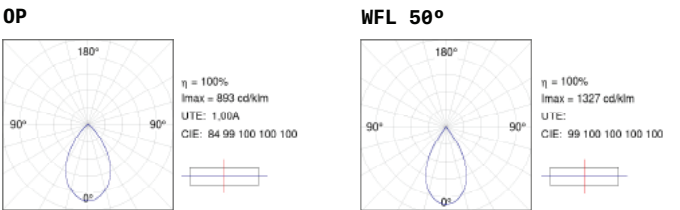


CO-CREATION options






Kombic Downlight 200  
Opal



Kombic Downlight 200  
Square Opal



KOMBIC DOWNLIGHT 200 OPAL

| Family | Installation |        | Lm LED    | IP       | Optic   | CRI  | K                | Gear     | Reflector Finishes |         | Ext. Finishes |  |
|--------|--------------|--------|-----------|----------|---------|------|------------------|----------|--------------------|---------|---------------|--|
| K31    | RD           | Round  | 30 3000lm | 40 IP 44 | OP Opal | 8 80 | 30 3000 K        | N ON/OFF | R Bright           | W White |               |  |
|        |              |        | 40 4000lm |          |         |      | 40 4000 K        | D DALI   | M Matt             |         |               |  |
|        |              |        | 50 5000lm |          |         |      |                  |          |                    |         |               |  |
|        | SQ           | Square | 30 3000lm | 40 IP 44 | OP Opal | 8 80 | 30 3000 K        | N ON/OFF | R Bright           | W White |               |  |
|        |              |        | 40 4000lm |          |         |      | 40 4000 K        | D DALI   |                    |         |               |  |
|        |              |        | 50 5000lm |          |         |      |                  |          |                    |         |               |  |
|        | RD           | Round  | 20 2000lm | 40 IP 44 | OP Opal | 9 90 | TW Tunable White | D DALI   | R Bright           | W White |               |  |
|        |              |        | 30 3000lm |          |         |      |                  |          | M Matt             |         |               |  |

K31 RD 30 40 OP 8 30 N R W

Example: K31 RD 30 40 OP 8 30 N R W


CO-CREATION options




TECHNICAL CHARACTERISTICS

Optics


RD BRIGHT



RD MATT



SQ BRIGHT



Light output and power

KOMBIC 200 RD

|    |      | 3000lm |    | 4000lm    |    | 5000lm    |    |           |
|----|------|--------|----|-----------|----|-----------|----|-----------|
|    | K    | CRI    | W  | lm Output | W  | lm Output | W  | lm Output |
| R  | 3000 | 80     | 17 | 2065      | 24 | 2800      | 36 | 3735      |
|    | 4000 | 80     | 17 | 2171      | 24 | 2944      | 36 | 4016      |
| MA | 3000 | 80     | 17 | 1982      | 24 | 2688      | 36 | 3576      |
|    | 4000 | 80     | 17 | 2084      | 24 | 2826      | 36 | 3845      |

KOMBIC 200 SQ

|   |      | 3000lm |    |           | 4000lm |           | 5000lm |           |
|---|------|--------|----|-----------|--------|-----------|--------|-----------|
|   | K    | CRI    | W  | lm Output | W      | lm Output | W      | lm Output |
| R | 3000 | 80     | 17 | 1522      | 24     | 2024      | 36     | 3249      |
|   | 4000 | 80     | 17 | 1602      | 24     | 2131      | 36     | 3494      |

KOMBIC 200 TW

|    |    | 2000lm |    |           | 3000lm |           |
|----|----|--------|----|-----------|--------|-----------|
|    | K  | CRI    | W  | lm Output | W      | lm Output |
| R  | TW | 90     | 12 | 1506      | 18     | 2161      |
| MA | TW | 90     | 12 | 1355      | 18     | 1989      |

ACCESSORIES

Decorative ring



Ref.

RIRD240W  
RIRD240G  
RIRD240B

Color



Transparent diffuser



Ref.

DITRRD240W  
DITRRD240G  
DITRRD240B

Color



Ø250 mm adapter ring



Ref.


ADRD250W

Color



ACCESSORIES

Decorative frame




Ref.

FRSQ235W  
FRSQ235B

Color



Transparent diffuser




Ref.

DITRSQ240W  
DITRSQ240B

Color



Concrete recessing box




Ref.

BORE404



Mini Kombic



MINI KOMBIC

| Family | Format   | Lm LED    | CRI  | K         | Gear     | Reflector Finishes | Ext. Finishes |
|--------|----------|-----------|------|-----------|----------|--------------------|---------------|
| MK2    | RD Round | 20 1800lm | 8 80 | 30 3000 K | N ON/OFF | BR Bright          | W White 04    |
|        |          | 25 2700lm |      | 40 4000 K | D DALI   | MA Metalized Matt  |               |
|        |          | 35 3600lm |      |           |          |                    |               |
| MK2    | RD       | 20        | 8    | 30        | N        | BR                 | W             |

Example: MK2 RD 20 8 30 N R W

TECHNICAL CHARACTERISTICS

Optics

**BRIGHT**

**MATT**

Light output and power

|    |      | 1800lm |    |           |    | 2700lm |           |      |  | 3600lm |           |  |  |
|----|------|--------|----|-----------|----|--------|-----------|------|--|--------|-----------|--|--|
|    | K    | CRI    | W  | lm Output |    | W      | lm Output |      |  | W      | lm Output |  |  |
| BR | 3000 | 80     | 12 | 1105      | 17 | 1623   | 25        | 2218 |  | 25     | 2218      |  |  |
|    | 4000 | 80     | 12 | 1163      | 17 | 1691   | 25        | 2329 |  |        |           |  |  |
| MA | 3000 | 80     | 12 | 1024      | 17 | 1357   | 25        | 1760 |  |        |           |  |  |
|    | 4000 | 80     | 12 | 1108      | 17 | 1414   | 25        | 1833 |  |        |           |  |  |

ACCESSORIES

Decorative ring

| Ref.       | Color |
|------------|-------|
| MKRIRD170B | ●     |
| MKRIRD170G | ●     |
| MKRIRD170W | ○     |


Transparent diffuser

| Ref.       | Color | Pict. |
|------------|-------|-------|
| MKDIRD170B | ●     |       |
| MKDIRD170G | ●     |       |
| MKDIRD170W | ○     |       |

CO-CREATION options



Mini Kombic Square



MINI KOMBIC SQUARE

| Family | Format    | Lm LED    | CRI  | K         | Gear     | Reflector Finishes | Ext. Finishes |
|--------|-----------|-----------|------|-----------|----------|--------------------|---------------|
| MK2    | SQ Square | 20 1800lm | 8 80 | 30 3000 K | N ON/OFF | BR Bright          | W White 04    |
|        |           | 25 2700lm |      | 40 4000 K | D DALI   |                    |               |
|        |           | 35 3600lm |      |           |          |                    |               |
| MK2    | SQ        | 20        | 8    | 30        | N        | BR                 | W             |

Example: MK2 SQ 20 8 30 N R W

TECHNICAL CHARACTERISTICS

Optics

**BRIGHT**

Light output and power

|    |      | 1800lm |    |           |    | 2700lm |           |      |  | 3600lm |           |  |  |
|----|------|--------|----|-----------|----|--------|-----------|------|--|--------|-----------|--|--|
|    | K    | CRI    | W  | lm Output |    | W      | lm Output |      |  | W      | lm Output |  |  |
| BR | 3000 | 80     | 12 | 912       | 17 | 1253   | 25        | 1618 |  | 25     | 1618      |  |  |
|    | 4000 | 80     | 12 | 967       | 17 | 1305   | 25        | 1685 |  |        |           |  |  |

ACCESSORIES

Decorative frame

| Ref.       | Color |
|------------|-------|
| MKFRSQ170B | ●     |
| MKFRSQ170W | ○     |

Transparent diffuser

| Ref.       | Color | Pict. |
|------------|-------|-------|
| MKDISQ170B | ●     |       |
| MKDISQ170W | ○     |       |

CO-CREATION options





Kombic Surface 100  
Opal ON/OFF 2000



Kombic Surface 100  
Opal DALI 2000/2500



Kombic Surface 100  
Opal TW 2000



Kombic Surface 100  
Optic ON/OFF 2000



Kombic Surface 100  
Optic DALI 2000/2500



Kombic Surface 100  
Optic TW 2000



| KOMBIC 100 OPAL                     |              |         |    |        |     |       |      |                    |               |        |    |               |   |                |   |          |   |          |
|-------------------------------------|--------------|---------|----|--------|-----|-------|------|--------------------|---------------|--------|----|---------------|---|----------------|---|----------|---|----------|
| Family                              | Installation | Lm LED  | IP | Optic  | CRI | K     | Gear | Reflector Finishes | Ext. Finishes |        |    |               |   |                |   |          |   |          |
| K11                                 | SF           | Surface | 20 | 2000lm | 40  | IP 40 | OP   | Opal               | 8             | 80     | 30 | 3000 K        | N | ON/OFF         | R | Bright   | W | White 02 |
|                                     |              |         | 25 | 2500lm |     |       |      |                    | 40            | 4000 K | D  | DALI          | M | Metalized Matt | B | Black 02 |   |          |
|                                     |              |         | 20 | 2000lm | 40  | IP 40 | OP   | Opal               | 9             | 90     | TW | Tunable White | D | DALI           | W | White    |   |          |
| Options                             |              |         |    |        |     |       |      |                    | 9             | 90     | 27 | 2700 K        |   |                |   |          |   |          |
|                                     |              |         |    |        |     |       |      |                    |               |        | 30 | 3000 K        |   |                |   |          |   |          |
|                                     |              |         |    |        |     |       |      |                    |               |        | 40 | 4000 K        |   |                |   |          |   |          |
|                                     |              |         |    |        |     |       |      |                    |               |        | 3W | 3000 WB       |   |                |   |          |   |          |
|                                     |              |         |    |        |     |       |      |                    |               |        | 4W | 4000 WB       |   |                |   |          |   |          |
| K11                                 | SF           | 20      | 40 | OP     | 8   | 30    | N    | R                  | W             |        |    |               |   |                |   |          |   |          |
| Example: K11 SF 20 40 OP 8 30 N R W |              |         |    |        |     |       |      |                    |               |        |    |               |   |                |   |          |   |          |

| KOMBIC 100 OPTIC                    |              |         |    |        |     |       |      |                    |               |        |    |               |   |        |   |                |   |          |
|-------------------------------------|--------------|---------|----|--------|-----|-------|------|--------------------|---------------|--------|----|---------------|---|--------|---|----------------|---|----------|
| Family                              | Installation | Lm LED  | IP | Optic  | CRI | K     | Gear | Reflector Finishes | Ext. Finishes |        |    |               |   |        |   |                |   |          |
| K11                                 | SF           | Surface | 20 | 2000lm | 40  | IP 40 | WF   | Wide Flood 50°     | 8             | 80     | 30 | 3000 K        | N | ON/OFF | B | Black          | B | Black 02 |
|                                     |              |         | 25 | 2500lm |     |       |      |                    | 40            | 4000 K |    |               | D | DALI   | M | Metalized Matt | W | White 02 |
|                                     |              |         | 20 | 2000lm | 40  | IP 40 | WF   | Wide Flood 50°     | 9             | 90     | TW | Tunable White | D | DALI   | W | White          |   |          |
| Options                             |              |         |    |        | 9   | 90    | 27   | 2700 K             |               |        |    |               |   |        |   |                |   |          |
|                                     |              |         |    |        |     |       | 30   | 3000 K             |               |        |    |               |   |        |   |                |   |          |
|                                     |              |         |    |        |     |       | 40   | 4000 K             |               |        |    |               |   |        |   |                |   |          |
| K11                                 | SF           | 20      | 40 | WF     | 8   | 30    | N    | B                  |               |        |    |               |   | B      |   |                |   |          |
| Example: K11 SF 20 40 WF 8 30 N B B |              |         |    |        |     |       |      |                    |               |        |    |               |   |        |   |                |   |          |


CO-CREATION options




TECHNICAL CHARACTERISTICS

Optics

OPAL



OPTIC



Light output and power

KOMBIC 100 OPAL

|    |      | 2000lm |     | 2500lm |           |
|----|------|--------|-----|--------|-----------|
|    |      | K      | CRI | W      | Im Output |
| OP | 3000 | 80     | 12  | 1460   | 18        |
|    | 4000 | 80     | 12  | 1567   | 18        |

KOMBIC 100 OPTIC

|     |      | 2000lm |     | 2500lm |           |
|-----|------|--------|-----|--------|-----------|
|     |      | K      | CRI | W      | Im Output |
| WFL | 3000 | 80     | 12  | 1205   | 18        |
|     | 50°  | 4000   | 80  | 12     | 1277      |

ACCESSORIES

Rigid suspension for electrical connection



| Ref.           | Color | m   |
|----------------|-------|-----|
| K1SUCARG0500NW | ○     | 0,5 |
| K1SUCARG0500DW | ○     | 0,5 |
| K1SUCARG0500NB | ●     | 0,5 |
| K1SUCARG0500DB | ●     | 0,5 |
| K1SUCARG1000NW | ○     | 1   |
| K1SUCARG1000DW | ○     | 1   |
| K1SUCARG1000NB | ●     | 1   |
| K1SUCARG1000DB | ●     | 1   |


Suspension




| Ref.           | Color | m |
|----------------|-------|---|
| K1SUCAWI2000NW | ○     | 2 |
| K1SUCAWI2000DW | ○     | 2 |
| K1SUCAWI2000NB | ●     | 2 |
| K1SUCAWI2000DB | ●     | 2 |



Kombic Surface 150  
Opal

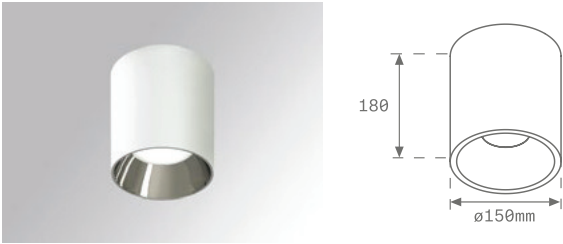

Kombic Surface 150  
Optic

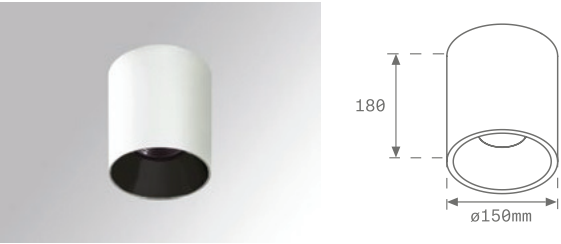

| KOMBIC 150 OPAL |              |         |        |        |       |       |     |      |    |        |      |               |                    |                |               |          |   |          |
|-----------------|--------------|---------|--------|--------|-------|-------|-----|------|----|--------|------|---------------|--------------------|----------------|---------------|----------|---|----------|
| Family          | Installation |         | Lm LED | IP     | Optic |       | CRI |      | K  |        | Gear |               | Reflector Finishes |                | Ext. Finishes |          |   |          |
| K21             | SF           | Surface | 20     | 2000lm | 40    | IP 40 | OP  | Opal | 8  | 80     | 30   | 3000 K        | N                  | ON/OFF         | R             | Bright   | W | White 02 |
|                 |              |         | 30     | 2500lm |       |       |     |      | 40 | 4000 K | D    | DALI          | M                  | Metalized Matt | B             | Black 02 |   |          |
|                 |              |         | 35     | 3500lm |       |       |     |      |    |        |      |               | W                  | White          |               |          |   |          |
|                 |              |         | 30     | 2500lm | 40    | IP 40 | OP  | Opal | 9  | 90     | TW   | Tunable White | D                  | DALI           |               |          |   |          |
| Options         |              |         |        |        |       |       |     |      | 9  | 90     | 27   | 2700 K        |                    |                |               |          |   |          |
|                 |              |         |        |        |       |       |     |      |    |        | 30   | 3000 K        |                    |                |               |          |   |          |
|                 |              |         |        |        |       |       |     |      |    |        | 40   | 4000 K        |                    |                |               |          |   |          |
|                 |              |         |        |        |       |       |     |      |    |        | 3W   | 3000 WB       |                    |                |               |          |   |          |
|                 |              |         |        |        |       |       |     |      |    |        | 4W   | 4000 WB       |                    |                |               |          |   |          |
| K21             | SF           |         | 20     |        | 40    |       | OP  |      | 8  |        | 30   |               | N                  |                | R             |          | W |          |

Example: K21 SF 20 40 OP 8 30 N R W

| KOMBIC 150 OPTIC |              |         |    |        |    |       |    |                |    |        |    |               |                    |                |               |          |   |          |
|------------------|--------------|---------|----|--------|----|-------|----|----------------|----|--------|----|---------------|--------------------|----------------|---------------|----------|---|----------|
| Family           | Installation | Lm LED  |    | IP     |    | Optic |    | CRI            |    | K      |    | Gear          | Reflector Finishes |                | Ext. Finishes |          |   |          |
| K21              | SF           | Surface | 20 | 2000lm | 40 | IP 40 | WF | Wide Flood 50° | 8  | 80     | 30 | 3000 K        | N                  | ON/OFF         | B             | Black    | B | Black 02 |
|                  |              |         | 30 | 2500lm |    |       |    |                | 40 | 4000 K | D  | DALI          | M                  | Metalized Matt | W             | White 02 |   |          |
|                  |              |         | 35 | 3500lm |    |       |    |                |    |        |    |               | W                  | White          |               |          |   |          |
|                  |              |         | 30 | 2500lm | 40 | IP 40 | WF | Wide Flood 50° | 9  | 90     | TW | Tunable White | D                  | DALI           |               |          |   |          |
| Options          |              |         |    |        |    |       |    |                | 9  | 90     | 27 | 2700 K        |                    |                |               |          |   |          |
|                  |              |         |    |        |    |       |    |                |    |        | 30 | 3000 K        |                    |                |               |          |   |          |
|                  |              |         |    |        |    |       |    |                |    |        | 40 | 4000 K        |                    |                |               |          |   |          |
| K21              | SF           |         | 20 |        | 40 |       | WF |                | 8  |        | 30 |               | N                  |                | B             |          | B |          |

Example: K21 SF 20 40 WF 8 30 N B B

CO-CREATION options



ACCESSORIES

Rigid suspension for electrical connection



| Ref.           | Color | m   |
|----------------|-------|-----|
| K2SUCARG0500NW | ○     | 0,5 |
| K2SUCARG0500DW | ○     | 0,5 |
| K2SUCARG0500NB | ●     | 0,5 |
| K2SUCARG0500DB | ●     | 0,5 |
| K2SUCARG1000NW | ○     | 1   |
| K2SUCARG1000DW | ○     | 1   |
| K2SUCARG1000NB | ●     | 1   |
| K2SUCARG1000DB | ●     | 1   |


Suspension



| Ref.           | Color | m |
|----------------|-------|---|
| K2SUCAWI2000NW | ○     | 2 |
| K2SUCAWI2000DW | ○     | 2 |
| K2SUCAWI2000NB | ●     | 2 |
| K2SUCAWI2000DB | ●     | 2 |



Kombic Surface 200  
Opal




| KOMBIC 200 OPAL |              |         |        |        |    |       |    |      |    |        |
|-----------------|--------------|---------|--------|--------|----|-------|----|------|----|--------|
| Family          | Installation |         | Lm LED |        | IP | Optic |    | CRI  |    | K      |
| K31             | SF           | Surface | 30     | 3000lm | 20 | IP 20 | OP | Opal | 8  | 80     |
|                 |              |         | 40     | 4000lm |    |       |    |      | 30 | 3000 K |
|                 |              |         |        |        |    |       |    |      |    |        |
|                 |              |         |        |        |    |       |    |      |    |        |
|                 |              |         |        |        |    |       |    |      |    |        |
|                 |              |         |        |        |    |       |    |      |    |        |
| K31             | SF           |         | 30     |        | 20 |       | OP |      | 8  | 30     |
|                 |              |         |        |        |    |       |    |      |    |        |

Example: K31 SF 30 20 OP 8 30 N R W

TECHNICAL CHARACTERISTICS

Optics

OPAL



Light output and power

KOMBIC 200 SURFACE

|    | K    | CRI | 3000lm |           | 4000lm |           |
|----|------|-----|--------|-----------|--------|-----------|
|    |      |     | W      | lm Output | W      | lm Output |
| OP | 3000 | 80  | 17     | 2065      | 24     | 2800      |
|    | 4000 | 80  | 17     | 2171      | 24     | 2944      |

DOWNLIGHT ACCESSORIES

Two steel cables electromechanical suspension



| Ref.         | Color | h(m)   |
|--------------|-------|--------|
| SUEM2W3000NW | ○     | max. 3 |
| SUEM2W3000NG | ●     | max. 3 |

Upper decorative cover for suspended model



| Ref.    | Color |
|---------|-------|
| K3SUCOW | ○     |

Electromechanical rigid



| Ref.         | Color | h(mm) |
|--------------|-------|-------|
| SUCARG0100W  | ○     | 100   |
| SUCARG0100G  | ●     | 100   |
| SUCARG0250W  | ○     | 250   |
| SUCARG0250G  | ●     | 250   |
| SUCARG0500W  | ○     | 500   |
| SUCARG0500G  | ●     | 500   |
| SUCARG01000W | ○     | 1000  |
| SUCARG01000G | ●     | 1000  |

CO-CREATION options

